

## 1. Operating System

One

Touch

Learn



- A.** 1. b. 2. a. 3. a. 4. a. 5. b. 6. d.  
**B.** 1. CUI 2. Operating System 3. Characters  
 4. GUI 5. Application Software  
**C.** 1. c. 2. d. 3. e. 4. a. 5. b.  
**D.** 1. T 2. F 3. T 4. T 5. T

Let's

Do

It



- A.** 1. An operating system is a system software that works as a mediator between user and computer hardware.  
 2. Two categories of software are: System software and application software.  
 3. Examples of character user interface are: DOS and windows command prompt.  
 4. Names of two GUI operating system are: Windows and Mac.  
**B.** 1. The differences between CUI and GUI are:

| CUI  | GUI  |
|--|--|
| It provides lots of commands to perform different types of operations. | It provides icons, buttons, windows and menus to give commands.                  |
| A user needs to remember lots of commands.                             | A user need not to remember commands. He can just click on the icons, menus etc. |
| It uses keyboard to give commands.                                     | It uses mouse, stylus, fingers to give commands.                                 |
| Examples are DOS, Windows Command Prompt, etc.                         | Examples are Windows, Mac, etc.  |

2. An operating system perform various functions:

**Managing Memory:** An operating system manages the memory space for multiple processes. It keeps track of every memory location, regardless of whether it is allocated to some process or it is free. It also allocates memory to the files and folders. When we delete a file or folder, the operating system de-allocates the memory space allocated for it.




**Managing Resources:** An operating system keeps a track of the hardware and software requirements of the processes. It works as a manager of the resources and allocates them to different programs.

3. We prefer to use GUI as in this interface, a user need not to remember all the commands. GUI allows us to give commands to the computer simply by clicking with the mouse.
4. (i) **Single-user Operating System:** This type of operating system allows only one user can access the computer system at a time. The most commonly used single-user operating systems are Palm computer and DOS.
- (ii) **Multi-user Operating System:** In this type of operating system, multiple users can use the computer at the same time. Examples of multi-user operating systems are Linux, Windows, etc.



A.

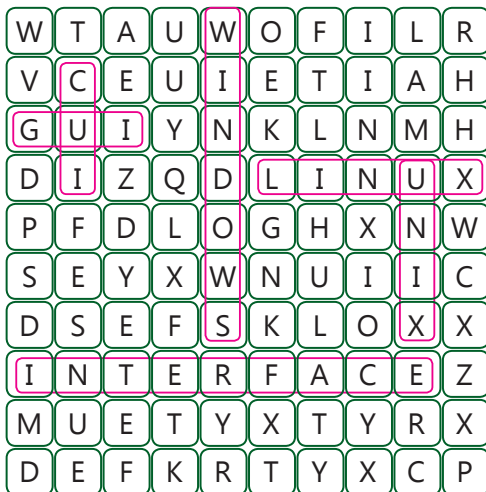

- B.
1. Tally is an application software.
  2. As a beginner, he should take the computer with GUI.



Do yourself.



## 2. Spreadsheet—Functions and Charts

### One Touch Learn

- A.** 1. a.                      2. a.                      3. c.                      4. b.                      5. b.  
6. a.                      7. c.                      8. c.
- B.** 1. F                      2. T                      3. F                      4. F                      5. F                      6. T
- C.** 1. Functions                      2. equal                      3. square root  
4. column                      5. Dollar                      6. Custom Sort
- D.** 1. b.                      2. c.                      3. d.                      4. a.


### Let's Do It

- A.** 1. A cell reference is a cell address that can be used in a formula to denote a specific cell.  
2. (i) Data series is related to the set of values. It is represented by the bars or slices that represent the data values.  
(ii) Legend is a key which shows the meanings of symbols and colours used in the chart.  
3. Arranging the selected data in ascending or descending order is called sorting.  
4. Area Chart are the chart which emphasise the area between the line and the axis with the help of the colours, textures, pictures, etc.
- B.** 1. It returns the length of the text string. Example:  
Input: =LEN("Touch")  
Output: 5
2. Rules to enter Functions are:  
(i) All Excel functions must begin with = sign  
(ii) Function name must be a valid Excel name.  
(iii) Function must be followed by opening and closing parenthesis.  
(iv) Most of the functions must contain an argument within it.
3. Column Chart is usually used to display the data in the form of vertical bars. It is used to show the changes in data over a period of time or comparison among the different data items.
- Whereas, Scatter charts show the correlations between the two sets of values. The x and y axis is used to represent the data plots on the chart.

### Crack The Code

- A.** 1. Pie Chart  
2. Cell Referencing

B.

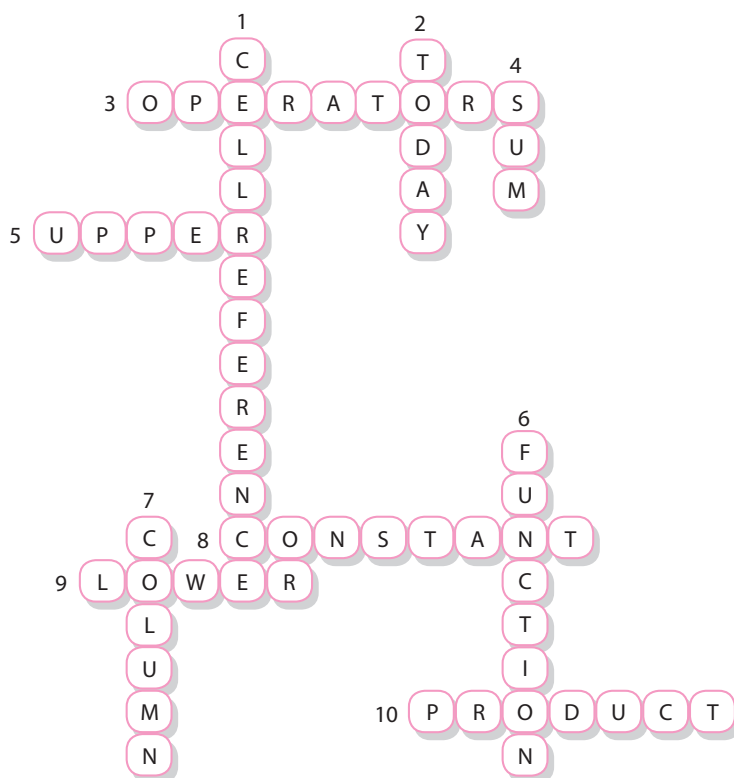

Do yourself.

## 3. Algorithms and Flowcharts



- |    |              |                       |               |
|----|--------------|-----------------------|---------------|
| A. | 1. b.        | 2. c.                 | 3. c.         |
| B. | 1. F         | 2. T                  | 3. F          |
| C. | 1. algorithm | 2. flow lines, arrows | 3. consistent |



- A.
- Algorithm is a set of steps in a sequential manner to solve a problem or to complete a task.
  - Flowchart is a graphical representation of the sequence of operations in an information system or program.




- B.** 1. Two characteristics of a good algorithm are:  
 (i) Precision: Each step is precisely defined.  
 (ii) Effective: It is measured in terms of time and space.
2. Process symbol shows a process or action step whereas input/output box represents material or information entering or leaving the system.
- C.** 1. Start/Stop 2. Decision 3. Process 4. Input/Output

### Crack The Code



- A.** 1. a. Start/Stop  
 b. Decision  
 c. Process  
 d. Input/Output
2. She should make an algorithm.

**B.**

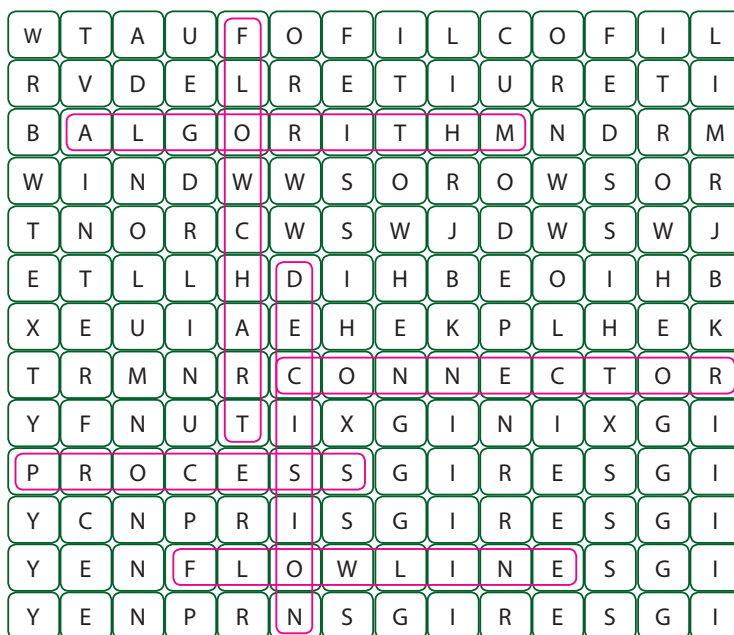

Do yourself.

## 4. Program Coding



- A.** 1. b. 2. d. 3. a. 4. b. 5. c.

- B.** 1. T                      2. T                      3. T                      4. F                      5. F
- C.** 1. c.                      2. a.                      3. d.                      4. b.
- D.** 1. high-level    2. output    3. operators    4. identifier    5. primitive



- A.** 1. Java is an object oriented high level programming language.  
2. Assignment operator is used to assign values to operands.  
3. Arithmetic operators are used to do basic mathematical calculations.
- B.** 1. Four Features of Java are as follows:  
(i) **Simple:** Java has relatively simple structure and clearly defined syntax.  
(ii) **Case sensitive:** Java is a case sensitive language.  
(iii) **Object-Oriented:** Java supports object-oriented programming concepts of classes and objects.  
(iv) **Platform Independent:** A Java can run on any platform without making changes to it, which means that the same program will run on windows, Linux, Macintosh, etc.  
2. Logical operators are used to combine multiple conditions and evaluate them. They return Boolean value 'true' or 'false' as a result.  
&&(AND) and ||(OR) are 2 types of logical operators.  
3. Unary operators are special operators which require only one operand or value to perform operations. Java provides only 2 unary operators which are increment (++) or decrement (--).
- C.** 1. 14.44  
2. GST to be paid 0.1  
total invoice value 2.1  
3. Value of a is 20  
Value of b is 10  
4. Kittu Sharma  
5. 20  
6. False  
True  
7. 12  
14
- D.** 1. 

```
public class program{
    public static void main(String[] args){
        int a = 10;
        int b = 20;
        int c = a + b;
        System.out.println("The value of c is: "+c);
    }
}
```

  
2. 

```
public class assignment{
    public static void main(String[] args){
```



- ```
int a = 10;
System.out.println(a);
}
}
```
3. No Error
  4. `public static void main(String[] args){`  
`System.out.println("Welcome");`  
`}`



- A.**
  1. Increment operator
  2. String
- B.**
  1. Java
  2. Equality operator
  3. Variable
  4. Keyword
  5. Integers
  6. Comments
  7. System.out.println



Do yourself.

## Worksheet-1

(Based on chapters 1 to 4)

- A.**

|               |              |
|---------------|--------------|
| 1. Linux      | Windows      |
| 2. Max        | Min          |
| 3. Line chart | Column Chart |
| 4. int        | else         |
- B.**
  1. Character User Interface
  2. Graphical User Interface
  3. Write Once Run Anywhere
  4. Integrated Development Environment
- C.**
  1. An object can be defined as a real-world entity such as telephone, mouse and bag.
  2. A class can be defined as a user defined blueprint or prototype that is used to create objects.
  3. Java is an object-oriented and high-level programming language.
  4. Algorithm is the sequence of steps or computer operations which collectively solve a given problem.
  5. A cell reference is a cell address that can be used in a formula to denote a specific cell.
  6. A Graphical User Interface is a type of interface that provides icons, buttons, pull down menus and windows to interact with the computer.



- D.**
  - 1. User Interface
  - 2. Single-user Operating System
  - 3. Cell range
  - 4. SQRT(number)
  - 5. LEFT(text, num\_chars)
  - 6. Flowcharts
  - 7. Identifiers
  - 8. Keywords
- E.**
  - 1. (Start/Stop)
  - 2. Decision
  - 3. Process
  - 4. Input/Output

## Test Sheet–1

(Based on chapters 1 to 4)

### Section A

- A.**
  - 1. d.
  - 2. b.
  - 3. c.
  - 4. b.
  - 5. c.
  - 6. c.
  - 7. b.
- B.**
  - 1. GUI
  - 2. application software
  - 3. square root
  - 4. consistent
  - 5. output
- C.**
  - 1. F
  - 2. F
  - 3. F
  - 4. T

### Section B

- A.**
  - 1. An operating system is a system software that works as a mediator between user and computer hardware.
  - 2.
    - a. Data series is related to the set of values. It is represented by the bars or slices that represent the data values.
    - b. Legend is a key which shows the meanings of symbols and colours used in the chart.
  - 3. A flowchart is a type of graphical diagram that represents an algorithm.
  - 4. Assignment operators are used to assign values to operands.
- B.**
  - 1. We prefer to use GUI as in this interface, a user need not to remember all the commands. GUI allows us to give commands to the computer simply by clicking with the mouse.
  - 2. It returns the length of the text string. Example:  
Input: =LEN("Touch")  
Output: 5





3. Two characteristics of a good algorithm are:
  - (i) Precision: Each step is precisely defined
  - (ii) Effective: It is measured in terms of time and space.
4. (i) Start.  
 (ii) Read F.  
 (iii)  $C = (5(F - 32)) / 9$ .  
 (iv) Print C.  
 (v) Stop
5. Logical operators are used to combine multiple conditions and evaluate them. They return Boolean value 'true' or 'false' as a result.  
 &&(AND) and ||(OR) are 2 types of logical operators.
6. 

```
public class A{
    public static void main(float P,float r,float t)
    {
        double SI=0;
        SI=(P*r*t)/100;
        System.out.println(SI);
    }
}
```
7. 14.44

## 5. Conditional Looping and Jumping Statement in Java

One Touch Learn



- |           |             |          |         |          |                |       |
|-----------|-------------|----------|---------|----------|----------------|-------|
| <b>A.</b> | 1. d.       | 2. a.    | 3. a.   | 4. c.    | 5. b.          | 6. c. |
| <b>B.</b> | 1. F        | 2. F     | 3. T    | 4. T     | 5. F           |       |
| <b>C.</b> | 1. do-while | 2. while | 3. case | 4. break | 5. conditional |       |

Let's Do It



- A.**
1. Looping statements are the control flow statements allow us to repeatedly execute a set of statements for a given number of times.
  2. The if statement is the most basic conditional statement in Java that allows us to test a condition before executing a block of statements.

3. The default keyword is used to specify some code to be executed if there is no matched case found.
4. The errors that occurred due to violating the rules of Java programming language are called syntax errors.

**B.** 1. The for loop in Java helps to repeat a set of statements a definite number of times.

The syntax of the for loop is:

```
for (initialisation; conditional expression; increment/decrement)
{
    [statements]
}
```

2. The break statement forcefully terminates the loop or switch execution within which it lies. It skips rest of the statements next to the break keyword in the loop and jumps over to the statement following the loop.

Whereas, the continue statement forces the next iteration of the loop to take place and skips the current iteration.

3. Jumping statements are those statement in which the control of the program is transferred out of the loop body, even if all the values of the iterations of the loop have not been completed. The two jumping statements are: Break and Continue
4. The errors that occurred due to violating the rules of Java programming language are called syntax errors. These are the most commonly occurred errors while developing programs in Java. Syntax errors are also known as compile time errors. Programs containing syntax errors does not compile.

On other hand, a logical error is a type of error due to which a program compiles and executes successfully, but gives the unexpected or incorrect result is called logical error. It is very difficult to find this type of errors in the program. Compiler does not able to find logical errors. We need to read our programs deeply to find logical errors. Logical errors are also called Semantic Errors.

**C.** 1. Square of 1 is: 1

Square of 2 is: 4

Square of 3 is: 9

Square of 4 is: 16

Square of 5 is: 25

Square of 6 is: 36

Square of 7 is: 49

Square of 8 is: 64

Square of 9 is: 81

Square of 10 is: 100

2. Hello World

Hello World

Hello World

Hello World

Hello World



3. 5
- 4
- 3
- 2
- 1

4. number is even

5. 4321

- D.**
1. 

```
public static void main(String args[])
{
    System.out.println("Table of 8");
    int a = 8, res;
    int i;
    for (i = 1; i <= 10; i++) {
        res = a * i;
        System.out.println(res);
    }
}
```
  2. 

```
public static void main(String args[])
{
    int i;
    for (i = 1; i <= 5; i++) {
        System.out.println("The value of i is: " + i);
    }
}
```
  3. 

```
public class modulus {
    public static void main(String args[])
    {
        int x = 20, y = 45;
        int mod = y % x;
        System.out.println("Modulus is " + mod);
    }
}
```
  4. 

```
public static void main(String args[])
{
    String s = "Touchpad";
    String s1 = "Orange";
    System.out.println(s + s1);
}
```

## Crack The Code

- A. 1. If statement  
2. While loop

B.

|   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|
| C | O | N | T | I | N | U | E | L | L |
| O | V | D | E | F | A | U | L | T | T |
| N | H | L | U | I | F | D | R | M | I |
| D | I | O | E | R | R | O | R | G | T |
| I | N | O | R | B | R | E | A | K | E |
| T | T | P | L | E | O | I | H | R | R |
| I | E | I | I | P | L | H | E | A | A |
| O | R | N | S | W | I | T | C | H | T |
| N | F | G | U | N | I | X | G | I | I |
| A | A | N | X | R | E | S | G | O | O |
| L | J | U | M | P | I | N | G | N | N |

## FUN in LAB

Do yourself.

## 6. App Development

### One Touch Learn

- A. 1. a.                      2. a.                      3. b.                      4. a.                      5. b.                      6. d.  
B. 1. F                      2. T                      3. F                      4. T                      5. T                      6. F  
C. 1. hybrid                      2. mobile                      3. android                      4. gaming                      5. install

### Let's Do It

- A. 1. An app is a software program primarily developed for hand-held smart devices such as mobile and tablet.  
2. A Web app is an application program that is stored on a remote server and accessed over the Internet through a Web browser interface.  
3. Native apps are platform dependent which means that these apps are primarily developed for a specific platform.



4. E-commerce apps is an app to buy or sell products while sitting at home or any other place.
5. Communication apps allow us to communicate with each other by sending and receiving messages, information, and opinion in the form of texts, videos, and audios.
6. Two popular app development tools are Appery, and AppMachine (any two).

**B.** 1. The types of apps are given the following:

- (i) **Entertainment Apps:** Entertainment apps are developed to entertain the people. These apps allow users to watch videos, post photos, search upcoming events, etc. The most commonly used entertainment apps are Netflix, Talking Tom and YouTube.
- (ii) **Utility Apps:** Utility apps allow us to do our daily tasks such as booking a cab, booking a railway ticket, booking an appointment with doctor, sharing files, and performing calculations. These apps make our work easy. The most commonly used utility apps are SHAREit, Calculator and Flashlight.
- (iii) **Educational Apps:** Educational apps provide a platform for children to learn from anywhere and anytime. The most commonly used educational apps are Khan Academy, Vedantu and Grammar EN.

2. Two categories of mobile apps are:

- (i) **Native Apps:** Native apps are platform dependent which means that these apps are primarily developed for a specific platform. For example, any app which is developed for iOS will not run on any other platform such as Android, Windows, and BlackBerry.
- (ii) **Web Apps:** Web apps are actually web applications which give a user with experience similar to native apps. These apps are not deployed on the app store. Hence, you need an extra app called browser to access these apps on your mobile device.

3. Web apps are different from websites. The major difference is that a web app can be a small part of a website which provides a particular functionality. On the other hand, a website can contain many web apps.

Some of the examples of the Web apps are OLX, Flipkart, and Pinterest.

4. Educational apps provide a platform for children to learn from anywhere and anytime. The most commonly used educational apps are Khan Academy, Vedantu and Grammar EN.
5. App Inventor allows us to test our app it is being created. So, to test your app, connect your Android device and download MI A12 companion. Now, follow the given steps:

1. Click on the **Connect** menu.
2. Select **AI Companion** from the drop-down list.
3. Open **MIT A12 Companion** on your device and connect by scanning the QR code or typing the code displayed on your screen.



**A.** 1. Gaming App

2. Utility App

**B.** 1. Mobile Apps

2. Google Play Store

3. iOS

4. Web Apps

5. Apple's App store

6. Hybrid Apps

7. Gaming Apps  
10. Web Apps

8. Educational Apps

9. Communication Apps



Do yourself.

## 7. Computer Networking



- A.** 1. a.                      2. c.                      3. b.                      4. b.                      5. a.                      6. a.  
7. d.                      8. d.                      9. a.
- B.** 1. T                      2. T                      3. T                      4. T                      5. T
- C.** 1. Protocol              2. SMTP              3. Router              4. Mesh              5. NIC
- D.** Ring Topology              Tree Topology              Bus Topology              Star Topology



- A.** 1. Protocol is a set of rules that governs the communication between the computers on a network.  
2. The components needed for a network are Network Interface Card, networking cable, hub or a switch and router.  
3. A client server is also called host computer. It controls the access to the hardware and software on the network.  
It is a computer which depends on the server for all the resources.  
4. Topology refers to the geometric arrangement of computers or nodes in a network.  
5. A gateway is a network device that allows to data to flow between two different networks which may use different protocols.
- B.** 1. A computer network is a group of interconnected computer systems and other computing devices.  
The advantages of computer network are:  
(i) The information can be easily shared by people.  
(ii) It reduces the cost of hardware.  
(iii) Store information in one centralised location.  
(iv) Reduction in installation cost.  
(v) User authentication process to secure the data.

2. LAN is a digital communication system that interconnects a larger number of computers and other peripheral devices within a radius of less than 1 km. This type of network is usually preferred for a smaller area such as a residence, school, laboratory, university campus or office building.


Whereas, MAN (Metropolitan Area Network) network consists of two or more local area networks or campus area networks together that usually spans several buildings in the same city or town.

3. A single digital page on the World Wide Web (WWW) that contains information and links of another pages is called a web page. Web pages are created by using the Hyper Text Markup Language (HTML). A website is a collection of web pages which are interlinked to each other. A website may contains thousands of web pages.
4. A sender is a computer that wants to send information to other computer connected to the network. On the other hand, A receiver is a computer which is expecting the data from other computer on the network.
5. An Internet Protocol (IP) address is an unique identification number assigned to a computer connected to a network. It has two main functions: host or network interface identification and location addressing. IP addresses are written and displayed in human-readable notations, such as 172.16.254.1.

### Crack The Code

- A.**
1. Ring Topology
  2. Network Server

**B.**

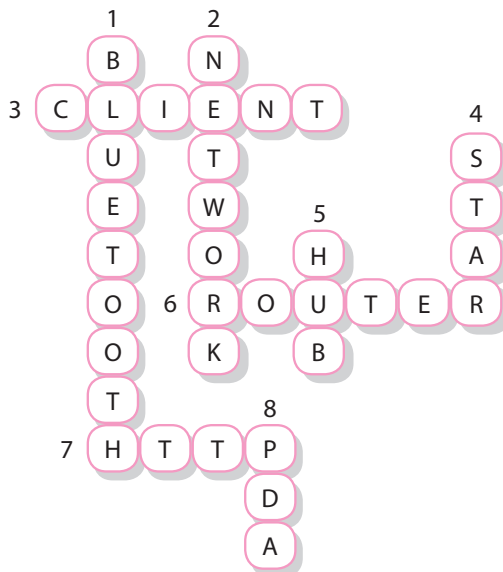

Do yourself.

## 8. Cloud Computing

### One Touch Learn

- A. 1. a.                      2. c.                      3. d.                      4. a.                      5. a.                      6. a.
- B. 1. Cloud computing                      2. OneDrive                      3. Cloud  
4. Shared                      5. Two
- C. 1. c.                      2. e.                      3. d.                      4. b.                      5. a.

### Let's Do It

- A. 1. Cloud computing is an Internet-based service that helps users to get shared resources, software, and information over a network on demand.
2. Cloud Computing has become very popular these days due to certain characteristics it has which are as follows: (any two)
- No dependence on location and devices:** Cloud computing lets access the resources with the help of a web browser. It does not depend on the device from which the user wants to use the cloud computing services. The users can access it from anywhere and anytime due to online infrastructure and internet-based access.
- Easy to Maintain:** Cloud Computing applications are easy to maintain do not require to be installed on the computers of every user. Anyone who is travelling or is at a different location for work can use the services without any hassle.
3. The name of cloud storage service that is provided by Apple is iCloud.
4. (i) **Speed:** The cloud computing provides data services on demand and the resources can be accessed within few seconds through internet.
- (ii) **Cost:** The cloud computing is cost effective as the user is not required to spend money on buying hardware, software and resources.
5. The drawback of cloud computing is needs a internet connection always. Without internet connection or network failure, we cannot reap the benefits of cloud computing.
- B. 1. Advantages of Cloud Computing are:
- (i) **Sharing of information globally:** The cloud computing enables users to access information from anywhere at anytime whenever they need it.



- (ii) **Productivity:** The cloud computing helps to increase the productivity as there is no need to set up any hardware, software in this. So, the work is reduced and productivity is increased.

Disadvantages of Cloud Computing are:

- (i) Cloud computing needs a internet connection always. Without internet connection or network failure we cannot reap the benefits of cloud computing.
  - (ii) We cannot solve technical faults at our end as we have to depend upon the third party for technical solutions.
2. To upload files on the OneDrive, follow the given steps:
- Step 1** Go to Home page of your OneDrive and click on the Upload button.
- Step 2** Select the Files option.
- Step 3** Select the file which user want to upload.
- Step 4** Click on the Open button.
3. Cloud Storage is the online storage space where users can save their documents, can access it through multiple devices.

Two service provider of cloud storage are DropBox and ZipCloud.

- (i) **DropBox:** The basic users of Dropbox are given 2 gigabytes of storage space. Whereas, if somebody has premium subscription then they are given 1 TB of storage space.
- (ii) **ZipCloud:** It is a cloud storage for documents, music, photos and videos. It offers 1 GB of free storage to users. But users can take 75GB, 250 GB, 1TB storage through paid plans.

**Crack The Code**



A.

|   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|
| C | O | N | T | I | N | U | E | S | L | L |
| O | N | E | D | R | I | V | E | K | T | T |
| N | H | L |   | I | F | D | R | Y | I | I |
| D | D | C | U | P | L | O | A | D | T | T |
| I | R | L | R | B | R | E | A | R | E | E |
| G | O | O | G | L | E | D | R | I | V | E |
| I | P | U | I | P | L | H | E | V | A | A |
| O | B | D | S | W | I | T | C | E | T | T |
| N | O | G | U | N | I | X | G | I | I | I |
| A | X | N | X | R | E | S | G | O | O | O |
| Z | I | P | C | L | O | U | D | N | N | N |

- B.** 1. She can upload her data on OneDrive.  
2. Sumit needs a Microsoft Account.



Do yourself.

## Worksheet-2

(Based on chapters 5 to 8)

- A.** 1. The if statement is the most basic conditional statement in Java that allows us to test a condition before executing a block of statements.  
2. The for loop in Java helps to repeat a set of statements a definite number of times.  
3. The break statement forcefully terminates the loop or switch execution within which it lies.  
4. Android is an operating system for mobile devices developed by Google.  
5. A computer network is a group of interconnected computer systems and other computing devices.  
6. Cloud computing is an Internet-based service that helps users to get shared resources, software, and information over a network on demand.
- B.** 1. continue Statement                      2. error  
3. App                                              4. iOS  
5. Bandwidth                                      6. Website  
7. Modem                                          8. OneDrive
- C.** 1. syntax errors                      runtime errors  
2. Khan Academy                      Vedantu  
3. LAN                                              WAN  
4. POP3                                              HTTP
- D.** 1. File Transfer Protocol  
2. Hyper Text Transfer Protocol  
3. Network Interface Card  
4. iPhone Operating System
- E.**

```
public static void main(String args[])
{
    int i;
    for (i = 1; i <= 5; i++) {
        System.out.println("The value of i is: " + i);
    }
}
```

# Test Sheet–2

(Based on chapters 5 to 8)

## Section A

- A.** 1. c.                      2. d.                      3. a.                      4. a.                      5. c.                      6. a.  
**B.** 1. do-while              2. gaming              3. mesh                  4. OneDrive  
**C.** 1. T                      2. T                      3. T                      4. T                      5. F

## Section B

- A.** 1. The if statement is the most basic conditional statement in Java that allows us to test a condition before executing a block of statements.  
2. Native apps are platform dependent which means that these apps are primarily developed for a specific platform.  
3. Protocol is a set of rules that governs the communication between the computers on a network.  
4. ISP stands for Internet Service Provider.  
5. Cloud computing is an internet-based service that helps users to get shared resources, software, and information over a network on demand.
- B.** 1. The break statement forcefully terminates the loop or switch execution within which it lies. It skips rest of the statements next to the break keyword in the loop and jumps over to the statement following the loop.  
Whereas, the continue statement forces the next iteration of the loop to take place and skips the current iteration.  
2. Web apps are different from websites. The major difference is that a web app can be a small part of a website which provides a particular functionality. On the other hand, a website can contain many web apps.  
3. An Internet Protocol (IP) address is an unique identification number assigned to a computer connected to a network. It has two main functions: host or network interface identification and location addressing. IP addresses are written and displayed in human-readable notations, such as 172.16.254.1.  
4. Advantages of Cloud Computing are:  
(i) **Speed:** The cloud computing provides data services on demand and the resources can be accessed within few seconds through internet.  
(ii) **Cost:** The cloud computing is cost effective.  
Disadvantages of Cloud Computing are:  
(i) Cloud computing needs a internet connection always. Without internet connection or network failure we cannot reap the benefits of cloud computing.  
(ii) We cannot solve technical faults at our end as we have to depend upon the third party for technical solutions.  
5. Square of 1 is: 1  
Square of 2 is: 4

Square of 3 is: 9  
Square of 4 is: 16  
Square of 5 is: 25  
Square of 6 is: 36  
Square of 7 is: 49  
Square of 8 is: 64  
Square of 9 is: 81  
Square of 10 is: 100

```
6. public static void main(String []args)
    {
        int reverse=0;
        int num=1234;
        while (num!=0)
        {
            reverse=reverse*10;
            reverse=reverse+num%10;
            num=num/10;
        }
        System.out.println(reverse);
    }
```